




SOLAR ECO WEDGER II

JGF143

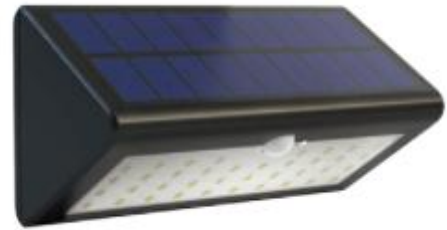

Product Data

Basic Info

LED Type:	SMD 2835
LED Color Tempt.:	4000K
Terminal Box:	NO
Degree of Protection:	III
Certification:	CE-EMC, RoHS
Dimmable:	NO
Beam Angle:	120°
Lifetime:	30,000 hours
Warranty:	2 years
Sensor	YES (PIR)

Lighting & Photometric Information

Code	Power	LED Q'ty	Lumen	CRI	Battery	Solar Panel
JGF143	4W	46	500lm	70	18650 2*3.7V/2.2Ah	5.5V/2.5W

Charge & Working Time

Charge Time:	8-10 hours
Working Time:	3 hours

Radar Sensor

Delay Time:	25 sec
-------------	--------

Lighting Modes

1- Pushing the switch(immediately to the right of the PIR bubble) will activate full brightness mode, again the light will turn off approx 25 seconds motion has ceased.

2-Push the light switch again, the lamp will activate immediately in Powersaving mode and turn off again approx 25 seconds after motion has ceased.

3-Push the light switch again to turn the light off stop it activating again.

Application

IP Rating:	44
------------	----


Appearance & Material

Material: ABS
Housing Colour: Black

Application Condition

Working Temperature: - 25°C ~ 40°C

2D Drawing

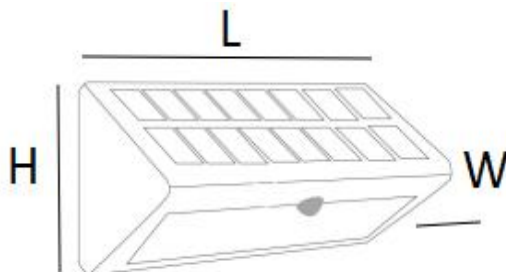

Packing

JGF143

Product Size (L*W*H /mm)	210*115*85
Product N.W. (g)	412
Q'ty/CTN (pcs)	8
CTN Size (cm)	50*22.5*21
CTN G.W.(kg)	4.3